

SINCE



1929

CERAMIC SERIES



CERAMIC COATING  
MARINE

WE GUARANTEE QUALITY



MADE IN GERMANY

## AUTOSOL® CS – CERAMIC COATING MARINE

- Marine Gelcoats, and paint coatings provide strong and thick protection.
- The gelcoat is prone to surface damage by environmental influences such as UV rays, bird droppings, dust, and more.
- AUTOSOL® CS – CERAMIC COATING MARINE is the perfect solution specifically engineered to protect against this damage.



SINCE



1929

## AUTOSOL® CS – CERAMIC COATING MARINE

- Creates a glass-like surface.
- Protects against scratches, oxidation, UV-light, graffiti, chemicals, and more.
- Perfectly smooth surface makes easy cleaning and maintenance.
- Elegant appearance with more intense colour appearance.
- Extreme durability means fewer detailing service appointments.
- Simple application steps.
- Ideal for all gelcoat types, and painted surfaces.



WE GUARANTEE QUALITY



MADE IN GERMANY

SINCE



1929

## AUTOSOL® CS – CERAMIC COATING MARINE

- Perfect glass-like surface
- No imperfections
- Deeper colour
- Extreme protection

WE GUARANTEE QUALITY




MADE IN GERMANY



## AUTOSOL® CS – CERAMIC COATING MARINE

Traditional waxes provide just a few months of protection. AUTOSOL® MARINE PROTECTION COATING provides even more protection, up to 5 Months.

Although these have traditionally been great options, AUTOSOL® CERAMIC COATING MARINE provides supreme durability up to 5 years protection.\*

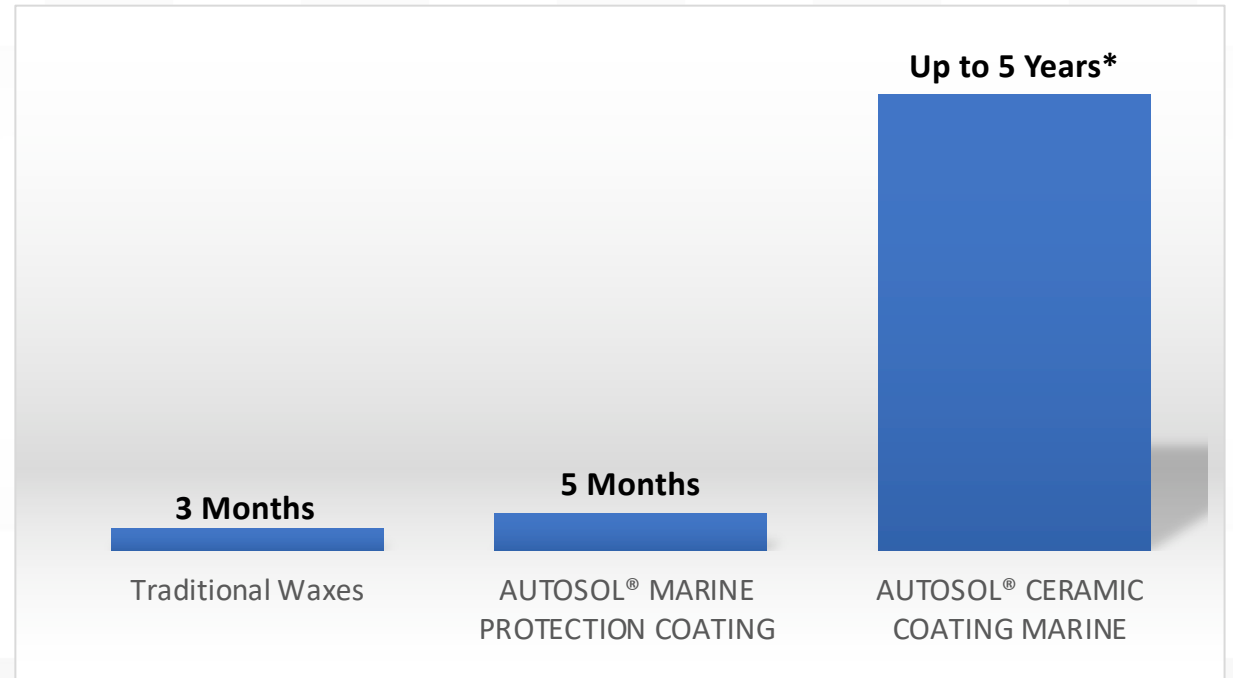

\*annual checkup needed.



SINCE

AUTOSOL

1929

# AUTOSOL® CS – CERAMIC COATING MARINE

## Technical info:

- Bottle 300 ml – covers 70-100 m<sup>2</sup>.
- For best results, 2 layers ceramic coating are necessary.
- Contents are approved for application through spray gun.
- Approximate application (excluding polishing time): 1-2 hrs.
- Coating should be checked during regular service, and/or every 3-6 months.



WE GUARANTEE QUALITY



MADE IN GERMANY



## **AUTOSOL® CS – CERAMIC COATING MARINE**

- Use AUTOSOL® DYNAMIC HEAVY CUT first to polish the surface, removing all imperfections.
- Clean the surface, removing all polishing residue and other contaminants with AUTOSOL® SURFACE PREP.
- Using the application set provided, evenly apply AUTOSOL® CS – CERAMIC COATING MARINE on the surface.
- Using a clean microfiber cloth, polish coated surface immediately following application until the surface is streak-free.
- Allow the surface to cure in a protected area for a minimum of 8 hrs., and a minimum of 24 hrs. before any contact with water.

